

# 3MP

#### **3MP HD Resolution**

Capture crystal-clear images with 3 million pixels, delivering superior details.



#### **Two-Way Audio**

Communicate clearly with visitors through built-in mic and speaker.



#### **Secure Local Storage**

Store videos privately on microSD cards, FTP servers, or Reolink Home Hub.



# People/Vehicle/Animal Detection

Get smart alerts for specific movements, minimizing false alarms.



#### **Solar Power Option**

Powered by solar for continuous monitoring (panels sold separately).



## **Voice Assistant Integration**

Control the camera with voice commands via Amazon Alexa and Google Assistant.



#### **Spotlight Night Vision**

Enjoy vivid, color night vision with powerful spotlight illumination.



# Multiple Installation Options


Easily install on walls, trees, poles, or tables for flexible positioning.



#### Free Reolink App


Manage cameras, receive alerts, and view live feeds from your smartphone.



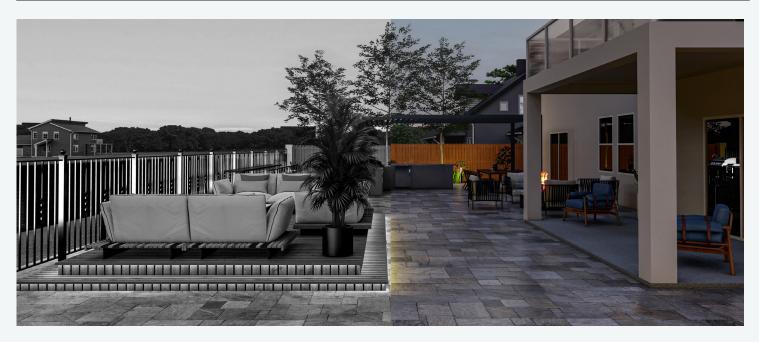

#### **Crystal-Clear Day & Night Surveillance**

With a 3MP sensor, Argus 3E captures detailed, high-definition images during the day and ensures clear, color night vision enhanced by its powerful spotlights, providing round-the-clock security.

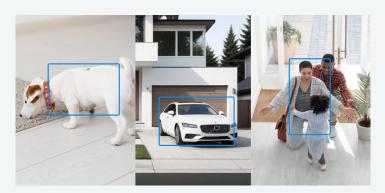

#### **Smart Detection Minimizes False Alarms**

The advanced algorithms of Argus 3E accurately detect people, vehicles, and animals, significantly reducing false alerts and ensuring that you only receive notifications for real threats.



#### **Versatile Installation for Any Location**

Whether you need to monitor your backyard, driveway, or room, Argus 3E's flexible mounting options—wall brackets, straps, and tabletop stands—make it easy to set up in virtually any location.



#### **Eco-Friendly Solar Power Solution**

By integrating with Reolink's solar panels, Argus 3E offers an environmentally friendly power option that keeps your surveillance system running smoothly without the need for constant battery changes.



#### **Subscription-Free Local Storage**

Keep your video recordings secure with local storage options including microSD cards, FTP servers, and Reolink Home Hub, ensuring data safety and accessibility without cloud dependency.



# **Gallery**









# One App/Client for All Control

Stay connected to your home or business anytime,  $\mbox{anywhere}. \label{eq:connected}$ 



# **Privacy in Your Hands**

We've prioritized your privacy, ensuring your data stays exclusively yours.





Image Sensor Resolution Resolutio
Lens Video Compression H.264/H.265 Field of View Diagonal: 115° Horizontal: 88° Vertical: 50° Infrared Night Vision Up to 10 meters (33ft); LED: 6pcs/0.8W/850nm (Auto-switching with IR-cut filter)  Color Night Vision With spotlights: 2pcs/2W/6500K Frame Rate Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps) Sub stream: 1024kbps - 2048kbps (default: 2048kbps) Sub stream: 64kbps - 256kbps (default: 192kbps) Audio Two-way audio  Power Battery 5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar Reolink Solar Panel (3W)  Interface Power Port USB Type-C port SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Video Compression Field of View Field of Vie
Pield of View  Field of View  Field of View  Diagonal: 115° Horizontal: 88° Vertical: 50°  Up to 10 meters (33ft); LED: 6pcs/0.8W/850nm (Auto-switching with IR-cut filter)  Color Night Vision  With spotlights: 2pcs/2W/6500K  Frame Rate  Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps) Sub stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps) Audio  Two-way audio  Power  Battery  S200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar  Reolink Solar Panel (3W)  Interface  Power Port  USB Type-C port  SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
Horizontal: 88° Vertical: 50°  Infrared Night Vision Up to 10 meters (33ft); LED: 6pcs/0.8W/850nm (Auto-switching with IR-cut filter)  Color Night Vision With spotlights: 2pcs/2W/6500K  Frame Rate Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps) Code Rate Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps) Audio Two-way audio  Power Battery 5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar Reolink Solar Panel (3W)  Interface Power Port USB Type-C port SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Vertical: 50°  Infrared Night Vision  Up to 10 meters (33ft); LED: 6pcs/0.8W/850nm (Auto-switching with IR-cut filter)  Color Night Vision  With spotlights: 2pcs/2W/6500K  Frame Rate  Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps)  Code Rate  Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps) Audio  Two-way audio  Power  Battery  5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar  Reolink Solar Panel (3W)  nterface  Power Port  USB Type-C port  SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
Infrared Night Vision  Up to 10 meters (33ft); LED: 6pcs/0.8W/850nm (Auto-switching with IR-cut filter)  Color Night Vision  With spotlights: 2pcs/2W/6500K  Frame Rate  Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps) Sub stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps) Audio  Two-way audio  Power  Battery  5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar  Reolink Solar Panel (3W)  nterface  Power Port  USB Type-C port SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
with IR-cut filter)  Color Night Vision With spotlights: 2pcs/2W/6500K  Frame Rate Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps) Code Rate Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps) Audio Two-way audio  Power Battery S200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar Reolink Solar Panel (3W)  Interface Power Port USB Type-C port SD Card Slot Supports Max. 128GB microSD card Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Frame Rate  Main stream: 10fps - 15fps (default: 15fps)  Sub stream: 1024Kbps - 2048Kbps (default: 2048Kbps)  Sub stream: 1024Kbps - 2048Kbps (default: 2048Kbps)  Sub stream: 64Kbps - 256Kbps (default: 192Kbps)  Audio  Two-way audio  Power  Battery  5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)  Solar  Reolink Solar Panel (3W)  nterface  Power Port  USB Type-C port  SD Card Slot  Supports Max. 128GB microSD card  Reset Button  YES  Audio In/Out  Built-in microphone and speaker  Ni-Fi  Wireless Standard  IEEE 802.11 b/g/n
Sub stream: 10fps - 15fps (default: 15fps)  Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps)  Audio Two-way audio  Power  Battery  5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.) Solar  Reolink Solar Panel (3W)  nterface  Power Port  SD Card Slot  Supports Max. 128GB microSD card  Reset Button  YES  Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
Code Rate  Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 192Kbps)  Audio  Two-way audio  Solor  Recolink Solar Panel (3W)  Type-C port SD Card Slot Supports Max. 128GB microSD card Reset Button Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  Main stream: 1024Kbps - 2048Kbps (default: 2048Kbps) Sub stream: 64Kbps - 256Kbps (default: 2048Kbps) Sub stream: 1024Kbps - 2048Kbps (default: 204Kbps (default: 204Kb
Audio  Audio  Two-way audio  Battery  S200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)  Solar  Reolink Solar Panel (3W)  Nterface  Power Port  SD Card Slot  Reset Button  Reset Button  Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  S200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)  Supports Max. 128GB microSD card  Supports Max. 128GB microSD card  Built-in microphone and speaker
Audio Two-way audio  Power  Battery  S200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)  Solar  Reolink Solar Panel (3W)  Power Port  USB Type-C port  SD Card Slot  Supports Max. 128GB microSD card  Reset Button  YES  Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
Power  Battery  5200mAh rechargeable battery (Battery life varies based on settings, usage & temperature.)  Solar  Reolink Solar Panel (3W)  Power Port  SD Card Slot  Supports Max. 128GB microSD card  Reset Button  YES  Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
settings, usage & temperature.)  Solar Reolink Solar Panel (3W)  Power Port USB Type-C port  SD Card Slot Supports Max. 128GB microSD card  Reset Button YES  Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Solar Reolink Solar Panel (3W)  Power Port USB Type-C port  SD Card Slot Supports Max. 128GB microSD card  Reset Button YES  Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Power Port USB Type-C port  SD Card Slot Supports Max. 128GB microSD card  Reset Button YES  Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
SD Card Slot  Reset Button  Audio In/Out  Supports Max. 128GB microSD card  YES  Audio In/Out  Built-in microphone and speaker  Wi-Fi  Wireless Standard  IEEE 802.11 b/g/n
Reset Button YES Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
Audio In/Out Built-in microphone and speaker  Wi-Fi Wireless Standard IEEE 802.11 b/g/n
<b>Wi-Fi</b> Wireless Standard IEEE 802.11 b/g/n
WI-1
Operating Frequency 2.4GHz
Wireless Security WPA-PSK/WPA2-PSK
Software OS Supported PC: Windows, macOS; Smartphone: iOS, Android
Protocols & Standards SSL, TCP/IP, UDP, UPNP, SMTP, NTP, P2P
User Access Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features Smart Alarm PIR detection; motion detection; person detection; vehicle
detection; animal detection
PIR Detecting Distance Adjustable, up to 10m (33ft)
PIR Detecting Angle 100° horizontal
Recording Modes Triggered recording
Time Lapse YES
Smart Home Compatibility Google Assistant
Home Hub Compatibility YES
Cloud Storage Supports Reolink Cloud (available in selected countries)
<b>Norking</b> Operating Temperature -10°C~55°C (14°F~131°F)
<b>Invironment</b> Operating Humidity 20% ~ 85%
Weatherproof IP65
Mechanical Dimensions 127*90*56 mm
Weight (Without Bracket) 239 g
<b>Varranty</b> Limited Warranty 2-year limited warranty. For support, visit
https://support.reolink.com/hc/en-us/.





1 Spotlight

- 2 Status LED
- 3 IR LED

4 Lens

- 5 Daylight Sensor
- 6 Built-In Mic

7 Built-In PIR Motion Sensor



- Reset Button
- 2 Power Switch
- 3 microSD Card Slot

6

7

- 4 USB Type-C Port
- 5 Bracket

6 Speaker

7 Bracket Attachment Screw Hole



## **Best Companion**







Reolink Solar Panel



USB-C Extension Cable for Reolink Solar Panels



## **Terms and Privacy**

Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com.

## **Limited Warranty**

This product comes with a 2-year limited warranty. Learn more: https://reolink.com/warranty-and-return/