

E1 Zoom

5MP PTZ Wi-Fi Indoor Camera with Auto Tracking

- 3× Optical Zoom
- 2.4/5 GHz WiFi
- Pan, Tilt & Auto Tracking



Specifications

Video & Audio	
Image Sensor	1/2.8" CMOS Sensors
Resolution	3840×2160 (8 Megapixels) @20fps
Lens	f=2.8-8mm, Max: F1.6
Zoom	3× optical zoom
Infrared Night Vision	Up to 12 meters (40ft); LED: 10pcs/850nm (Auto-switching with IR-cut filter)
Frame Rate	Main Stream: 2fps - 20fps(default: 20fps) Sub Stream: 4fps - 15fps(default: 10fps)
Code Rate	Main Stream: 2048Kbps -5120Kbps(default: 4096Kbps) Sub Stream: 64Kbps -512Kbps(default: 256Kbps)
Audio	Two-way audio
Power Requirements	
DC Power	DC 5.0V 2A
Interface	
Power Port	DC power port
Reset Button	YES


Ethernet Port	One 10M/100Mbps; RJ45
SD Card Slot	Supports Max. 512GB microSD card
Audio In/Out	Built-in microphone and speaker
Wi-Fi	
Wireless Standard	IEEE 802.11 ax/ac/a/b/g/n
Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA/WPA2/WPA3
Pan & Tilt	
PT Angle(Max.)	Pan: 355°, Tilt: 50°
Preset Points	Supports 1 guard position & up to 64 preset positions
Power-off Memory Function	YES
Auto Tracking	YES (Only Pan)
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Access	Max. 20 users (1 admin & 19 user); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection/person detection/pet detection/crying detection
Record Mode	Motion-triggered recording (default); scheduled recording; 24/7 recording
Time Lapse	YES
Smart Home Compatibility	Alexa, Google Assistant
Privacy Mode	YES
Working Environment	

Operating Temperature	-10°C to +55°C (14°F to 131°F)
Operating Humidity	20%–85%
Mechanical	
Dimensions	Φ84x118mm
Weight	275g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/

Gallery & Specs



- 1. Daylight Sensor
- 2. 10 IR LEDs
- 3. Lens
- 4. Status LED
- 5. Built-In Mic
- 6. Reset Button
- 7. Micro SD Card Slot

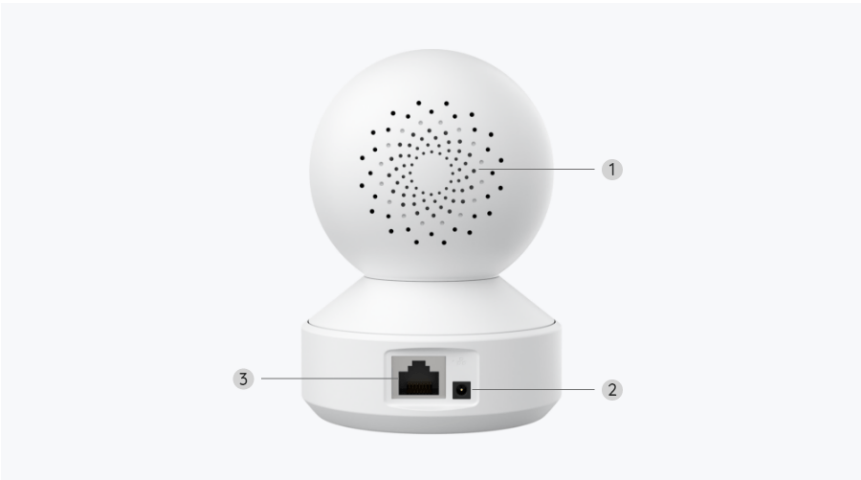

- 1. Speaker
- 2. Power